


PAXS5000

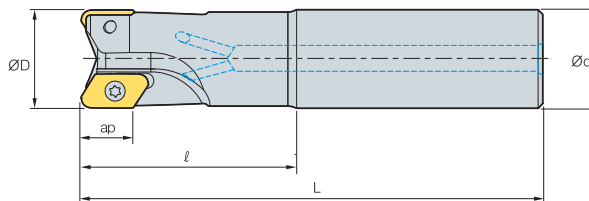

AA
90°

• AR: 5°~10°
• RR: -14°~-5°

(mm)

Designation		ØD	Ød	l	L	Max rpm	ap	
PAXS 5020HR-A,B	1	20	20	60	130	15,000	17	0.24
5025HR-A,B	2	25	25	60	140	32,600	17	0.4
5025HR-A,B-L200	2	25	25	60	200	32,600	17	0.63
5032HR-A,B	2	32	32	70	150	28,800	17	0.74
5032HR-A,B-L220	2	32	32	70	220	28,800	17	1.2
5040HR-A,B-S32	3	40	32	70	160	25,800	17	1.0
5040HR-A,B-L220	3	40	32	70	220	25,800	17	1.4
5040HR-A,B-S40	3	40	40	70	160	25,800	17	1.3
5040HR-A,B-S42	3	40	42	70	160	25,800	17	1.4

• A type: Insert NoseR 0.4~3.2, B type: Insert NoseR 4.0~5.0

Available inserts

XEKT-MA XEKT-ML



Designation	Cermet		Coated						Uncoated			page	Designation	Cermet		Coated						Uncoated			page														
	CN2000	CN30	NC5330	NCM535	NCM545	PC2505	PC22510	PC3700	PC6510	PC9530	PC9540			PC5300	PD2000	PD1010	ST30A	G10	H01	H05	CN2000	CN30	NC5330	NCM535		NCM545	PC2505	PC22510	PC3700	PC6510	PC9530	PC9540	PC5300	PD2000	PD1010	ST30A	G10	H01	H05
XEKT 19M504FR-MA												●	●			●	●																						
19M508FR-MA												●	●			●	●																						
19M512FR-MA												●	●			●	●																						
19M516FR-MA													●				●																						
19M518FR-MA													●				●																						
19M520FR-MA													●	●			●	●																					
19M530FR-MA													●				●																						
19M532FR-MA													●	●			●	●																					
19M540FR-MA													●	●			●	●																					
19M550FR-MA													●	●			●	●																					
XEKT 19M504ER-ML																																							
19M508ER-ML																																							
19M512ER-ML																																							
19M516ER-ML																																							
19M518ER-ML																																							
19M520ER-ML																																							
19M530ER-ML																																							
19M532ER-ML																																							
19M540ER-ML																																							
19M550ER-ML																																							

Parts

Specification	Screw	Wrench
Ø20	PTKA0407	TW 15S
Ø25~Ø40	PTKA0408	TW 15S

Available inserts E29