

MINICUT

Bohrungsbearbeitung

grooving, boring and profiling


Typ 614 / 616 / 618

Klemmhalter Stahl

D min. 14 mm

toolholder steel

D min. 14 mm

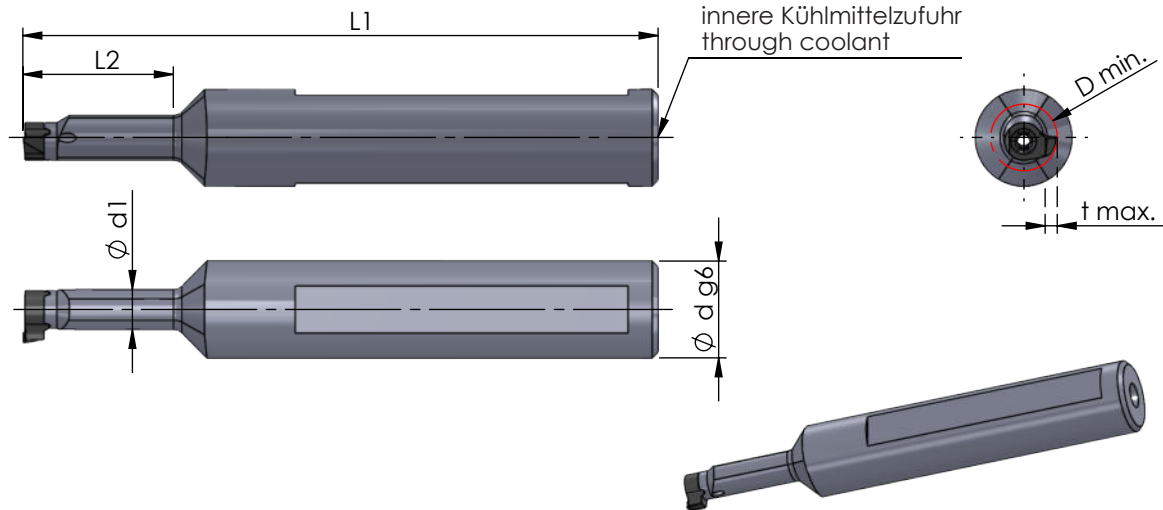

Abmessungen in mm

dimensions in mm

Bestellnummer part number	Ø d g6		Ø d1	L1	L2	Typ: t max. / D min.			Spannschraube screw	Schraubenschlüssel wrench	Anzugs- drehmoment torque	für Schneidplatte use with insert
614.0127.3ST	12.7	1/2"	9.5x11	100	18	R/L S014: 4.0 / Ø14	R/L S55: 5.5 / Ø16	R/L S65: 6.5 / Ø17	M4-MC	T15F	4.5 Nm	R/L S14 R/L S014 R/L S55 R/L S65
614.0158.3E.ST	15.875	5/8"	9.5x11	120	38							
614.0016.3ST	16		9.5x11	100	18							
614.0016.3E.ST	16		9.5x11	120	38							
616.0158.3E.ST	15.875		11x13.5	120	42	R/L S016: 4.3 / Ø16			M5-MC	T20F	7.0 Nm	R/L S16 R/L S016
616.0016.3ST	16		11	100	22							
616.0016.3E.ST	16		11x13.5	120	42							
618.0020.3ST	20		11.5x14.2	95	25	R/L S18: 6 / Ø18	R/L S20: 8 / Ø20					R/L S18 R/L S20
618.0020.3E.ST	20		11.5x14.2	120	45							

Bestellbeispiel:
614.0127.3ST

order-example:
614.0127.3ST