

## MIKROMILL

Nut- und Formzirkularfräsen

groove milling  
by circular interpolation


## Typ MB6 / MB8

Vorwärts- und Rückwärtsfasen

D min. 6 / 8 mm

forward and backward chamfering

D min. 6 / 8 mm

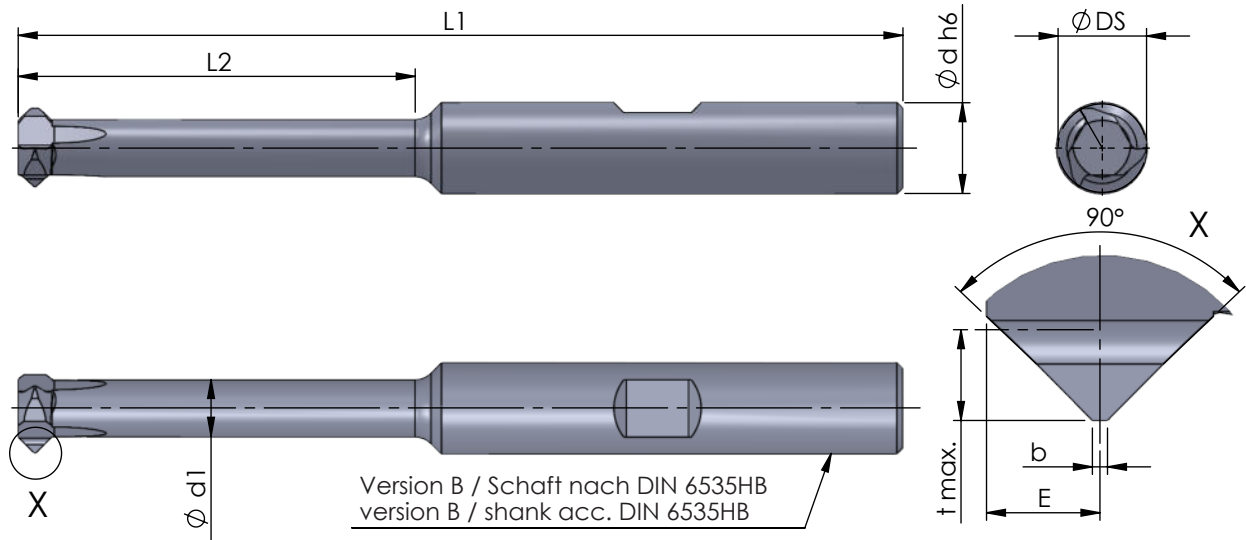

Abmessungen in mm

dimensions in mm

| Bestellnummer<br>part number | D min. | b   | L2 | L1 | E   | Ø d h6 | Ø d1 | Ø DS | t max. | Schneidenzahl<br>cutting edge | K10F | AL41F | P18C |
|------------------------------|--------|-----|----|----|-----|--------|------|------|--------|-------------------------------|------|-------|------|
| MB6.4545.02-15               | 6      | 0.2 | 15 | 58 | 1   | 6      | 4.2  | 5.8  | 0.6    | 3                             | ●    | ●     | ●    |
| MB6.4545.02-25               | 6      | 0.2 | 25 | 68 | 1   | 6      | 4.2  | 5.8  | 0.6    | 3                             | ●    | ●     | ●    |
| MB8.4545.02-25               | 8      | 0.2 | 25 | 68 | 1.5 | 8      | 5    | 7.8  | 1.2    | 3                             | ●    | ●     | ●    |
| MB8.4545.02-35               | 8      | 0.2 | 35 | 78 | 1.5 | 8      | 5    | 7.8  | 1.2    | 3                             | ●    | ●     | ●    |

Weitere HM Sorten können Sie in der Sorten-  
übersicht im Kapitel "Technische Hinweise" und  
der Preisliste finden.

Bestellbeispiel:  
für Sorte AL41F:  
MB6.4545.02-15/AL41F

More carbide grades you can find in the grades  
summary in the chapter "technical instructions"  
and in the price list.

order-example:  
grade AL41F:  
MB6.4545.02-15/AL41F