





SWUBR/L



WB□T

ØD Min. machining Dia.

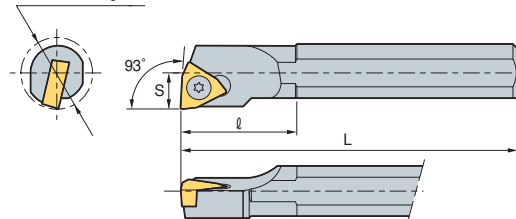

93°

Steel shank type

• R type insert
(mm)

Designation	ØD	Ød	H	L	S	ℓ	Insert	Screw	Wrench	Fig
S05H-SWUBR/L-02	5.5	5	4.5	100	2.75	-	WBGT 0201□□R/L	FTNA0203	TW06P	2
S08K-SWUBR/L-02	8	8	7	125	4	30	WBGT 0201□□R/L	FTNA02033	TW06P	
S08K-SWUBR/L-S3	10	8	7	125	5	18	WBGT S302□□R/L	FTNA02205	TW06P	
A08F-SWUBR/L-02	8	8	7.5	80	4	30	WBGT 0201□□R/L	FTNA0203	TW06P	
A08F-SWUBR/L-S3	10	8	7.5	80	5	16	WBGT S302□□R/L	FTNA02205	TW06P	

Carbide shank type

(mm)

Designation	ØD	Ød	H	L	S	ℓ	Insert	Screw	Wrench	Fig
C05H-SWUBR/L-02	6	5	4.4	100	3		WB□T0201□□	FTNA0203	TW06P	1
C06H-SWUBR/L-02	7	6	5.4	100	3.5			FTNA02033	TW06P	2
C08K-SWUBR/L-02	9	8	7	125	4.5			FTNA02205	TW06P	
C08K-SWUBR/L-S3	10	8	7	125	4.5		WB□TS301□□	FTNA02205	TW06P	2
E06H-SWUBR/L-02	7	6	5.4	100	3.5		WB□T0201□□	FTNA0203	TW06P	
E08K-SWUBR/L-02	9	8	7	125	4.5			FTNA02033	TW06P	
E08K-SWUBR/L-S3	10	8	7	125	5		WB□TS301□□	FTNA02205	TW06P	

Applicable inserts B89

• Use left handed insert for right handed holder



※ See page B136 for applicable sleeves

