

RMH8QC(M)4000

Shim type





Fig. 1

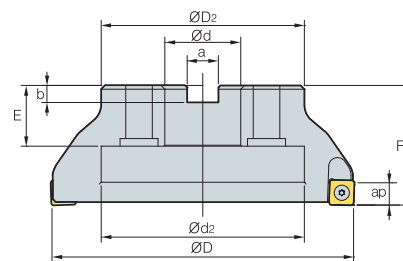


Fig. 2



AA
88°

• AR: -6°
• RR: -8° ~ -6°

(mm)

Designation			ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	ap	 kg	Fig.
RMH8QC (RMH8QCM)	4080HR-M	7	80	57	25.4 (27)	14	20	9.5 (12.4)	6 (7)	25 (23)	50	11.5	1.1	1
	4100HR-M	8	100	67	31.75 (32)	18	26	12.7 (14.4)	8	33 (25.5)	63 (50)	11.5	2.5	1
	4125HR-M	10	125	87	38.1 (40)	22	32	15.9 (16.4)	10 (9)	36 (30)	63	11.5	3.0	1
	4160R-M	12	160	107	50.8 (40)	-	107	19 (16.4)	11 (9)	38 (32)	63	11.5	4.0	2
	4200R-M	16	200	130	47.625 (60)	-	135	25.4 (25.7)	14	38 (32)	63	11.5	5.9	2

() Metric size

Available inserts


SNM(E)X-MF

SNEX-ML

new

SNM(E)X-MM

SNEX-MA



Designation	Cermet		Coated										Uncoated			page
	CN2000	CN30	NCM325	NC5330	NCM535	NCM545	PC2505	PC2010	PC3600	PC3700	PC6510	PC9530	PC9540	PC5300	PC5400	
SNEX	1206QNN-MF									●	●			●	●	E22 E23 E24
	1206QNN-ML													●	●	
	1206QNN-MM										●			●	●	
	1206QNN-MA															
	120612-MF										●			●	●	
	120612-ML													●	●	
	120612-MM										●					
SNMX	120612-MA															●
	1206QNN-MF				●				●	●	●			●	●	
	1206QNN-MM				●				●	●	●		●	●	●	
	120612-MF								●	●	●			●	●	
	120612-MM								●	●				●	●	

Available arbors

Designation		Available arbors	
		RMH8QC	RMH8QCM
RMH8QC (RMH8QCM)	4080HR-□	BT□□-FMA25.4-□□	BT□□-FMC27-□□
	4100HR-□	BT□□-FMA31.75-□□	BT□□-FMC32-□□
	4125HR-□	BT□□-FMA38.1-□□	BT□□-FMB40-□□ BT□□-FMC40-□□
	4160R-□	BT□□-FMA50.8-□□	
	4200R-□	BT□□-FMA47.625-□□	BT□□-FMB60-□□

Parts

Specification	Screw	Shim	Shim Screw	Wrench
Ø80~Ø200	PTKA0411-R3	SS42RM8	SHXN0609F	TW15S

Available inserts E22~E24 Available arbors and bolt E400~E402

