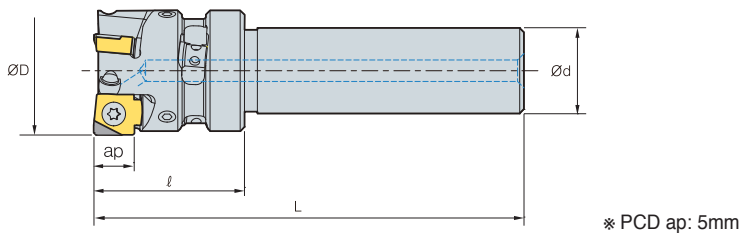


MAPDS000HR/L-Z0


AA
90°

- AR: 6°
- RR: -4°~1°

Designation			ØD	Ød	l	L	ap	Max rpm	kg
MAPDS	032HR/L-Z3	3	32	20	35	100	9.5	26,000	0.35
	040HR/L-Z4	4	40	20	35	100	9.5	24,500	0.42

(mm)

Available inserts

		SNEW	SNEW-XAF	SNEW-NAF		
					Strengthened edge	
Designation		Uncoated			PCD	page
		H01	G10	ST30A	DP200	
SNEW	09T3ADFR	●				E22 E23
	09T3ADTR-XAF				●	
	09T3ADTR-XAW				●	
	09T3ADTR-NAF				●	
	09T3ADTR-NAW				●	

Parts

Specification					
Ø32~Ø63	FTKA0408	AHX0617F-NYLOK	KHD0405	TW15S	HW20L

Available inserts E22, E23