


AMS2000M

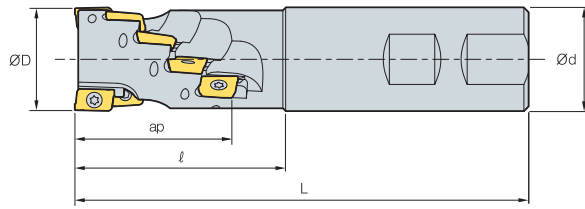

AA
90°
• AR: 7°~9°
• RR: -13°~ -10°

(mm)

Designation		ØD	Ød	l	L	No. of flute	ap		
AMS	2020M	3	20	20	45	120	1	29.4	0.32
	2025M	8	25	25	55	130	2	38.9	0.40
	2032M	10	32	32	65	140	2	48.5	0.65
	2040M	14	40	40	75	150	2	58	0.75

Available inserts




Designation	Cermet		Coated										Uncoated		page			
	CN2000	CN30	NCM325	NC5330	NCM535	NCM545	PC2505	PC2510	PC3600	PC3700	PC6510	PC9530	PC9540	PC5300		PC5400	G10	H01
APMT 11T3PDFR-MA																		●
11T308PDFR-MA																		
11T3PDER-ML														●	●			
11T308PDER-ML														●	●			
11T3PDSR-MM			●	●	●		●	●	●	●	●	●		●	●			
11T3PDSR-MF				●				●	●	●	●			●	●			
11T308PDSR-MM				●					●	●			●	●	●			
11T312PDSR-MM				●					●	●			●	●	●			
11T316R-MM				●					●	●				●	●			
11T318R-MM																		
11T324R-MM				●					●	●				●	●			
11T3PDSR-MN2														●	●			
11T3PDSR-MN3														●	●			

E05

※ Please purchase 2 types of APMT-MN (nick type) inserts with different chip breakers. ※ Please use the cutters with even teeth.

Caution when clamping the inserts

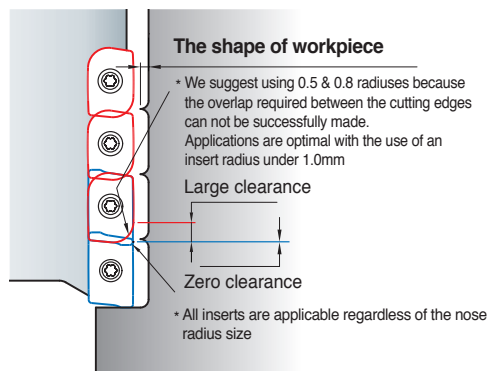

Parts

Specification		
Ø20~Ø40	FTKA02565S	TW08S

Available inserts E05

