


HFMM new

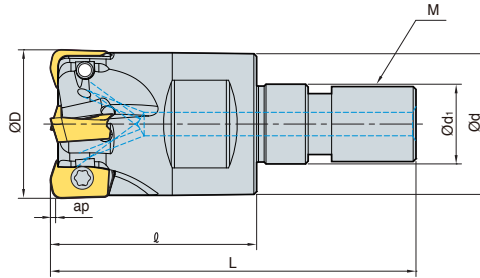

AA
13°

• AR: -4°
• RR: -14° ~ -3°

(mm)

Designation			ØD	Ød	Ød ₁	ℓ	L	M	ap	
HFMM	1008HR-M06	1	8	9.5	6.5	17	32	M06	0.4~0.5	0.01
	1010HR-M06	2	10	9.5	6.5	17	32	M06	0.4~0.5	0.01
	1011HR-M06	2	11	9.5	6.5	17	32	M06	0.4~0.5	0.01
	1012HR-M06	3	12	11	6.5	19	34	M6B	0.4~0.5	0.01
	1013HR-M06	3	13	11	6.5	19	34	M6B	0.4~0.5	0.01
	1016HR-M08	4	16	14.5	8.5	22	39	M08	0.4~0.5	0.03
	1017HR-M08	4	17	14.5	8.5	22	39	M08	0.4~0.5	0.03
	1020HR-M10	5	20	18	10.5	25	46	M10	0.4~0.5	0.06
	1021HR-M10	5	21	18	10.5	25	46	M10	0.4~0.5	0.06
	1025HR-M12	6	25	23	12.5	27	51	M12	0.4~0.5	0.11
	1026HR-M12	6	26	23	12.5	27	51	M12	0.4~0.5	0.11
	1030HR-M16	7	30	29	17	30	60	M16	0.4~0.5	0.17
	1032HR-M16	8	32	29	17	30	60	M16	0.4~0.5	0.18
	1033HR-M16	8	33	29	17	30	60	M16	0.4~0.5	0.18

Available inserts



Designation	Cermet		Coated										Uncoated			page
	CN2000	CN30	NCM325	NC5330	NCM535	NCM545	PC2505	PC2510	PC3600	PC3700	PC6510	PC9530	PC9540	PC5300	PC5400	
LPMT	040210R-MF							●		●				●	●	E11 E12
	040220R-MF							●		●				●	●	
LPMW	040210R						●	●						●		
	040220R						●	●						●		
LPEW	040210R						●	●						●		
	040220R						●	●						●		

Parts

Specification		
Ø8~Ø10	FTKA01840	
Ø11~Ø33	FTKA01842	TW06S-A

Available inserts E11, E12 Available adaptor E371~E372