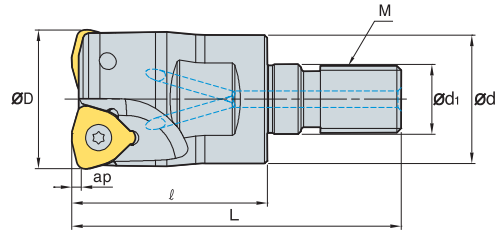



HRMDM06 newAA
14°• AR: -7°
• RR: -18° ~ -25°

(mm)

Designation			ØD	Ød	Ød ₁	ℓ	L	M	ap	
HRMDM	0616HR-M08	2	16	14.5	8.5	25	42	M08	1.0	0.03
	0617HR-M08	2	17	14.5	8.5	25	42	M08	1.0	0.03
	0618HR-M08	2	18	14.5	8.5	25	42	M08	1.0	0.03
	0620HR-M10	2	20	18	10.5	30	51	M10	1.0	0.06
	0621HR-M10	2	21	18	10.5	30	51	M10	1.0	0.07
	0625HR-M12	3	25	23	12.5	35	59	M12	1.0	0.10
	0626HR-M12	3	26	23	12.5	35	59	M12	1.0	0.11
	0632HR-M16	4	32	29	17	40	67	M16	1.0	0.21
0633HR-M16	4	33	29	17	40	67	M16	1.0	0.22	

Available inserts

WNMX-MF

WNMX-ML

WNMX-MM



Designation	Cermet		Coated										Uncoated			page
	CN2000	CN30	NCM325	NC5330	NCM535	NCM545	PC2505	PC2510	PC3600	PC3700	PC6510	PC9530	PC9540	PC5300	PC5400	
WNMX 060312ZNN-MF									●					●	●	E28
060312ZNN-ML														●	●	
060312ZNN-MM							●	●	●	●				●	●	

Available adaptor

Designation	Available adaptor
HRMDM 0616HR-M08	MAT- M08
0617HR-M08	MAT- M08
0618HR-M08	MAT- M08
0620HR-M10	MAT- M10
0621HR-M10	MAT- M10

Designation	Available adaptor
HRMDM 0625HR-M12	MAT- M12
0626HR-M12	MAT- M12
0632HR-M16	MAT- M16
0633HR-M16	MAT- M16

Designation: HRMDM0625HR-M12
Modular head threading measure size (M12)

II

Adaptor spec.: MAT-M12-030-S20S
Adaptor threading measure (M12)**Parts**

Specification		
		
	Screw	Wrench
Ø16~Ø33	ETNA02506	TW07S

Available inserts E28 Available adaptor E371~E372