
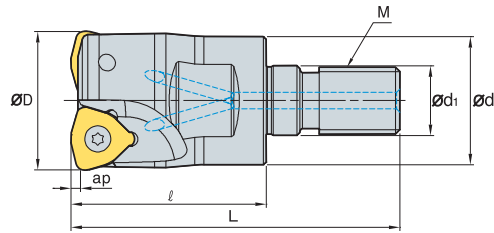


HRMDM13



AA
14°

• AR: -7°
• RR: -18° ~ -25°

(mm)

Designation			ØD	Ød	ød ₁	ℓ	L	M	ap	
HRMDM	1332HR-M16	2	32	29	17	40	67	M16	2	0.20
	1333HR-M16	2	33	29	17	40	67	M16	2	0.20
	1335HR-M16	2	35	29	17	40	67	M16	2	0.22
	1340HR-M16	3	40	29	17	45	72	M16	2	0.26

Available inserts

WNMX-MF

WNMX-ML

WNMX-MM



Designation	Cermet		Coated										Uncoated			page
	CN2000	CN30	NCM325	NC5330	NCM635	NCM545	PC2505	PC2510	PC3600	PC3700	PC6510	PC9530	PC9540	PC5300	PC5400	
WNMX	130520ZNN-MF								●					●	●	E28
	130520ZNN-ML													●	●	
	130520ZNN-MM						●	●	●	●		●	●	●	●	

Available adaptor

Designation	Available adaptor
HRMDM 1332HR-M16	MAT-M16
1333HR-M16	
1335HR-M16	
1340HR-M16	

Designation: HRMDM0932HR-M16
Modular head threading measure size (M16)

II

Adaptor spec.: MAT-M16-120-S32T
Adaptor threading measure (M16)

Parts

Specification		
	 Screw	 Wrench
Ø32~Ø40	FTKA0412B	TW15S

Available inserts E28 Available adaptor E371~E372



Milling

E