


HRMS08/10

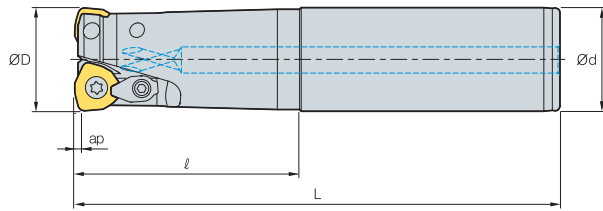

AA
15°
• AR: 7°
• RR: -11° ~ -5°

(mm)

Designation			ØD	Ød	ℓ	L	ap	
HRMS	0820HR-2S20	2	20	20	50	130	1.0	0.3
	0820HR-2M20	2	20	20	100	180	1.0	0.4
	0820HR-2L20	2	20	20	130	250	1.0	0.5
	0821HR-2S20	2	21	20	50	130	1.0	0.3
	0821HR-2M20	2	21	20	50	180	1.0	0.4
	0821HR-2L20	2	21	20	50	250	1.0	0.5
	1025HR-2S25	2	25	25	60	140	1.5	0.4
	1025HR-2M25	2	25	25	120	200	1.5	0.6
	1025HR-2L25	2	25	25	180	300	1.5	0.9
	1026HR-2S25	2	26	25	60	140	1.5	0.4
	1026HR-2M25	2	26	25	60	200	1.5	0.6
	1026HR-2L25	2	26	25	60	300	1.5	1.0
	1030HR-2S32	2	30	32	70	150	1.5	0.8
	1030HR-2M32	2	30	32	120	200	1.5	1.0
1030HR-2L32	2	30	32	180	300	1.5	1.5	

Available inserts

WDKT-MH



Type	Designation		Cermet		Coated												Uncoated			page
			CN2000	CN30	NCM325	NC5330	NCM535	NCM545	PC2505	PC2510	PC3600	PC3700	PC6510	PC9530	PC9540	PC5300	PC5400	ST30A	G10	
08 type	WDKT	080316ZDSR-MH							●	●	●	●	●	●	●	●				E27
10 type	WDKT	10T320ZDSR-MH							●	●	●	●	●	●	●	●				

Parts

Specification	Screw	Clamp	Clamp screw	C-ring	Wrench
Ø20~Ø21 (08 type)	FTNA0306	-	-	-	TW09P
Ø25~Ø30 (10 type)	FTKA0408	CHH3.5R1	CTX03510	CR03	TW15S

Available inserts E27

