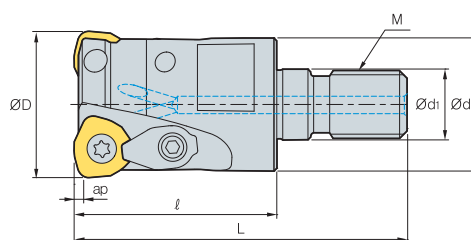


HRMM08

AA
15°• AR: 7°
• RR: -11° ~ -5°

(mm)

Designation		ØD	Ød	Ød1	l	L	M	ap	kg
HRMM	0820HR-M10	2	20	18	10.5	30	M10	1	0.06
	0821HR-M10	2	21	18	10.5	30	M10	1	0.06
	0825HR-M12	3	25	23	12.5	35	M12	1	0.11
	0826HR-M12	3	26	23	12.5	35	M12	1	0.11
	0828HR-M12	3	28	23	12.5	35	M12	1	0.12
	0832HR-M16	4	32	29	17	40	M16	1	0.21
	0833HR-M16	4	33	29	17	40	M16	1	0.21
	0835HR-M16	4	35	29	17	40	M16	1	0.23
	0840HR-M16	5	40	29	17	40	M16	1	0.25

Available inserts

WDKT-MH



Designation		Cermet		Coated												Uncoated			page	
		CN2000	CN30	NCM325	NC5330	NCM535	NCM545	PC2505	PC2510	PC3600	PC3700	PC6510	PC9530	PC9540	PC5300	PC5400	ST30A	G10		H01
WDKT	080316ZDSR-MH							●	●	●	●		●		●	●				E27

Available adaptor

Designation	Available adaptor
HRMM 0820HR-M10	MAT-M10
0821HR-M10	
0825HR-M12	
0826HR-M12	MAT-M12
0828HR-M12	
0832HR-M16	
0833HR-M16	MAT-M16
0835HR-M16	
0840HR-M16	

Designation: HRMM0820HR-M10
Modular head threading measure size (M10)

II

Adaptor spec.: MAT-M10-030-S20S
Adaptor threading measure (M10)

Parts

Specification	Screw	Clamp	Clamp screw	C-ring	Wrench	Wrench
Ø20~Ø40	FTNA0306	-	-	-	-	-

Available inserts E27 Available adaptor E371~E372