

LBE 08/10/12/16/20/25/30/32

Carbide Shank (Ball type)

Straight type

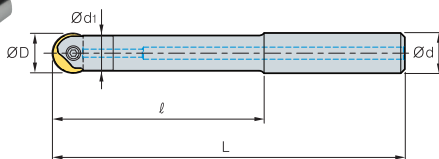


Fig. 1

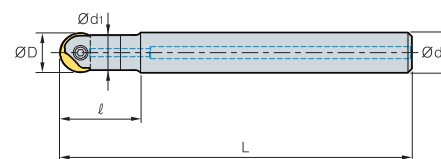


Fig. 2



(mm)

	Designation	Dimensions					Parts		Available inserts (Ø)	Fig.
		ØD	Ød	Ød1	l	L	Clamp screw	Wrench		
LBE	080080S-S08C	8, 9	8	7.5	80	136	ETND02506F	TWP07S	8, 9	1
	080100S-S08C	8, 9	8	7.5	100	156				
	080020S-S08C-130	8, 9	8	7.5	20	130	ETND02506F	TWP07S	8, 9	2
	080020S-S08C-150	8, 9	8	7.5	20	150				
	100080S-S10C	10, 11	10	9.5	80	136	ETND0307F	TWP08S	10, 11	1
	100120S-S10C	10, 11	10	9.5	120	176				
	100023S-S10C-130	10, 11	10	9.5	23	130	ETND0307F	TWP08S	10, 11	2
	100023S-S10C-170	10, 11	10	9.5	23	170				
	120100S-S12C	12, 13	12	11.5	100	156	ETND03509	TWP10S	12, 13	1
	120150S-S12C	12, 13	12	11.5	150	206				
	120025S-S12C-150	12, 13	12	11.5	25	150	ETND03509	TWP10S	12, 13	2
	120025S-S12C-200	12, 13	12	11.5	25	200				
	160100S-S16C	16, 17	16	15.5	100	160	ETND0413	TWP15S	16, 17	1
	160150S-S16C	16, 17	16	15.5	150	210				
	160030S-S16C-160	16, 17	16	15.5	30	160	ETND0413	TWP15S	16, 17	2
	160030S-S16C-210	16, 17	16	15.5	30	210				
	200120S-S20C	20, 21	20	19.5	120	190	ETKD0516	TWP20	20, 21	1
	200170S-S20C	20, 21	20	19.5	170	240				
	200035S-S20C-190	20, 21	20	19.5	35	190	ETKD0516	TWP20	20, 21	2
	200035S-S20C-240	20, 21	20	19.5	35	240				
	250140S-S25C	25, 26	25	24.5	140	220	ETKD0620	TWP25	25, 26	1
	250170S-S25C	25, 26	25	24.5	170	250				
	250040S-S25C-220	25, 26	25	24.5	40	220	ETKD0620	TWP25	25, 26	2
	250040S-S25C-250	25, 26	25	24.5	40	250				
	300140S-S32C	30, 31	32	29.5	140	230	ETGD0825	TWP40	30, 31	1
	300170S-S32C	30, 31	32	29.5	170	260				
	300050S-S32C-230	30, 31	32	29.5	50	230	ETGD0825	TWP40	30, 31	2
	300050S-S32C-260	30, 31	32	29.5	50	260				
	320140S-S32C	32	32	31.5	140	230	ETGD0825	TWP40	32, 33	1
	320170S-S32C	32	32	31.5	170	260				
	320050S-S32C-230	32	32	31.5	50	230	ETGD0825	TWP40	32, 33	2
	320050S-S32C-260	32	32	31.5	50	260				

Available inserts E08, E09

