



PAXC(M)6000

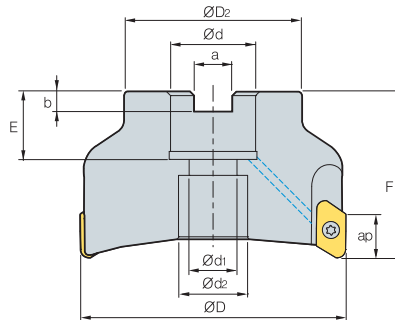

• AR: 8°~17.5°
• RR: -9.5°~ -5°

(mm)


Designation			ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	Max rpm	ap	
PAXCM	6050HR-A,B	2	50	42	16	9	14	8.4	5.6	18	50	23,000	23	0.32
	6063HR-A,B	3	63	49	22	11	18	10.4	6.3	21	50	20,500	23	0.53
PAXC (PAXCM)	6080HR-A,B	4	80	57	25.4 (27)	14	20	9.5 (12.4)	6 (7)	25 (23)	50	18,200	23	0.73
	6100HR-A,B	5	100	67	31.75 (32)	18	26	12.7 (14.4)	8 (8)	32.5 (26)	63	16,300	23	1.7
	6125HR-A,B	6	125	87	38.1 (40)	22	32	15.9 (16.4)	10 (9)	35 (29)	63	14,600	23	3.06

• A type: Insert NoseR 0.4~3.2, B type: Insert NoseR 4.0~5.0

()Metric size

Available inserts

XEKT-MA XEKT-ML



new

Designation	Cermet	Coated	Uncoated	page	Designation	Cermet	Coated	Uncoated	page
	CN2000 CN30	NCM925 NC5330 NCM635 NCM545 PC2505 PC2510 PC3600 PC3700 PC6510 PC9530 PC9540 PC5300 PC5400	ST30A G10 H01 H05			CN2000 CN30	NCM925 NC5330 NCM635 NCM545 PC2505 PC2510 PC3600 PC3700 PC6510 PC9530 PC9540 PC5300 PC5400	ST30A G10 H01 H05	
XEKT 250604FR-MA			●●	E29	XEKT 250604ER-ML				E29
250608FR-MA			●●		250608ER-ML				
250612FR-MA			●●		250612ER-ML				
250616FR-MA					250616ER-ML				
250620FR-MA			●●		250620ER-ML				
250630FR-MA					250630ER-ML				
250632FR-MA			●●		250632ER-ML				
250640FR-MA					250640ER-ML				
250650FR-MA			●●		250650ER-ML				

Available arbors

Designation	Ød	Available arbors
PAXCM 6050HR-A,B	16	BT□□-FMC16-□□
6063HR-A,B	22	BT□□-FMC22-□□
PAXC 6080HR-A,B	25.4	BT□□-FMA25.4-□□
(PAXCM)	27	BT□□-FMC27-□□
6100HR-A,B	31.75	BT□□-FMA31.75-□□
	32	BT□□-FMC32-□□
6125HR-A,B	38.1	BT□□-FMA38.1-□□
	40	BT□□-FMC40-□□

Parts

Specification	Screw	Wrench
Ø50~Ø125	FTGA0513-P	TW 20-100

Available inserts E29 Available arbors and bolt E400~E402

