


PAXS5000

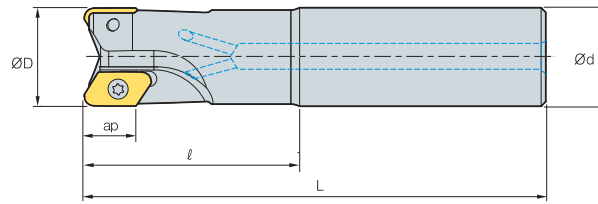

AA
90°
• AR: 5°~10°
• RR: -14°~-5°

(mm)

Designation		ØD	Ød	l	L	Max rpm	ap	
PAXS 5020HR-A,B	1	20	20	60	130	15,000	17	0.24
5025HR-A,B	2	25	25	60	140	32,600	17	0.4
5025HR-A,B-L200	2	25	25	60	200	32,600	17	0.63
5032HR-A,B	2	32	32	70	150	28,800	17	0.74
5032HR-A,B-L220	2	32	32	70	220	28,800	17	1.2
5040HR-A,B-S32	3	40	32	70	160	25,800	17	1.0
5040HR-A,B-L220	3	40	32	70	220	25,800	17	1.4
5040HR-A,B-S40	3	40	40	70	160	25,800	17	1.3
5040HR-A,B-S42	3	40	42	70	160	25,800	17	1.4

• A type: Insert NoseR 0.4~3.2, B type: Insert NoseR 4.0~5.0

Available inserts

XEKT-MA

XEKT-ML



Designation	Coated										page
	CN2000	CN30	NC5330	NCM535	NCM545	PC2505	PC2510	PC3700	PC6510	PC9530	
XEKT 19M504FR-MA											E29
19M508FR-MA											
19M512FR-MA											
19M516FR-MA											
19M518FR-MA											
19M520FR-MA											
19M530FR-MA											
19M532FR-MA											
19M540FR-MA											
19M550FR-MA											
Designation	Coated										page
	CN2000	CN30	NC5330	NCM535	NCM545	PC2505	PC2510	PC3700	PC6510	PC9530	
XEKT 19M504ER-ML											E29
19M508ER-ML											
19M512ER-ML											
19M516ER-ML											
19M518ER-ML											
19M520ER-ML											
19M530ER-ML											
19M532ER-ML											
19M540ER-ML											
19M550ER-ML											

Parts

Specification		
Ø20	PTKA0407	TW 15S
Ø25~Ø40	PTKA0408	

Available inserts E29