


PAXS6000

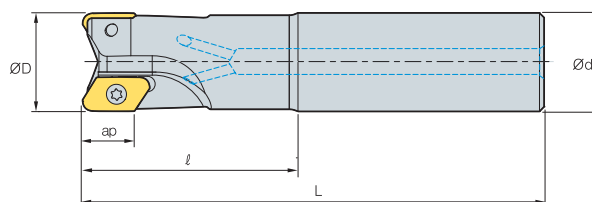


(mm)

Designation		ØD	Ød	l	L	Max rpm	ap	
PAXS 6025HR-A,B	1	25	25	60	140	32,600	23	0.42
6025HR-A,B-L200	1	25	25	60	200	32,600	23	0.63
6032HR-A,B	1	32	32	70	150	28,800	23	0.72
6032HR-A,B-L220	1	32	32	70	220	28,800	23	1.14
6040HR-A,B-S32	2	40	32	70	160	25,800	23	0.88
6040HR-A,B-L220	2	40	32	70	220	25,800	23	1.23
6040HR-A,B-S40	2	40	40	70	160	25,800	23	1.2
6040HR-A,B-S42	2	40	42	70	160	25,800	23	1.3

• A type: Insert NoseR 0.4~3.2, B type: Insert NoseR 4.0~5.0

Available inserts

XEKT-MA XEKT-ML



Designation	Cermet	Coated	Uncoated	page	Designation	Cermet	Coated	Uncoated	page
XEKT 250604FR-MA	CN2000	NCM325	ST30A		XEKT 250604ER-ML	CN2000	NCM325	ST30A	
250608FR-MA	CN30	NC5330	G10		250608ER-ML	CN30	NC5330	G10	
250612FR-MA		NCM535	H01		250612ER-ML		NCM535	H01	
250616FR-MA		NCM545	H05		250616ER-ML		NCM545	H05	
250620FR-MA		PC2505			250620ER-ML		PC2505		
250630FR-MA		PC2510			250630ER-ML		PC2510		
250632FR-MA		PC3600			250632ER-ML		PC3600		
250640FR-MA		PC3700			250640ER-ML		PC3700		
250650FR-MA		PC6510			250650ER-ML		PC6510		
		PC9530					PC9530		
		PC9540					PC9540		
		PC5300					PC5300		
		PC5400					PC5400		

Parts

Specification	Screw	Wrench
Ø25~Ø32	FTGA0510-P	TW 20-100
Ø40	FTGA0513-P	

Available inserts E29

