

## RM4PC(M)4000





Fig. 1

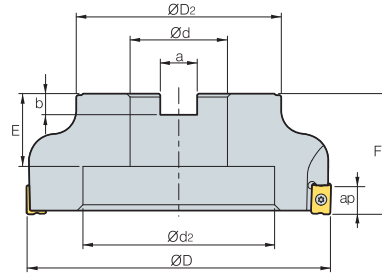


Fig. 2



• AR: -6°  
• RR: -19° ~ -13°


(mm)

| Designation       |          |  | ØD  | ØD2       | Ød         | Ød1 | Ød2       | a           | b         | E       | F       | ap          |  | Bolt   | Fig. |
|-------------------|----------|-----------------------------------------------------------------------------------|-----|-----------|------------|-----|-----------|-------------|-----------|---------|---------|-------------|-----------------------------------------------------------------------------------|--------|------|
| RM4PCM            | 4040HR   | 3                                                                                 | 40  | 36        | 16         | 11  | 18        | 8.4         | 5.6       | 19      | 40      | 14          | 0.23                                                                              | SB0825 | 1    |
|                   | 4050HR   | 3                                                                                 | 50  | 46        | 22         | 11  | 18        | 10.4        | 6.3       | 20      | 40      | 14          | 0.36                                                                              | SB1025 | 1    |
|                   | 4050HR-M | 4                                                                                 | 50  | 46        | 22         | 11  | 18        | 10.4        | 6.3       | 20      | 40      | 14          | 0.35                                                                              | SB1025 | 1    |
|                   | 4050HR-H | 5                                                                                 | 50  | 46        | 22         | 11  | 18        | 10.4        | 6.3       | 20      | 40      | 14          | 0.36                                                                              | SB1025 | 1    |
|                   | 4063HR   | 4                                                                                 | 63  | 49        | 22         | 11  | 18        | 10.4        | 6.3       | 20      | 40      | 14          | 0.56                                                                              | SB1025 | 1    |
|                   | 4063HR-M | 6                                                                                 | 63  | 49        | 22         | 11  | 18        | 10.4        | 6.3       | 20      | 40      | 14          | 0.57                                                                              | SB1025 | 1    |
| RM4PC<br>(RM4PCM) | 4080HR   | 5                                                                                 | 80  | 57        | 25.4 (27)  | 14  | 20        | 9.5 (12.4)  | 6.0 (7.0) | 25 (23) | 50      | 14          | 1.18 (1.16)                                                                       | SB1230 | 1    |
|                   | 4080HR-M | 7                                                                                 | 80  | 57        | 25.4 (27)  | 14  | 20        | 9.5 (12.4)  | 6.0 (7.0) | 25 (23) | 50      | 14          | 1.17 (1.14)                                                                       | SB1230 | 1    |
|                   | 4080HR-H | 8                                                                                 | 80  | 57        | 25.4 (27)  | 14  | 20        | 9.5 (12.4)  | 6.0 (7.0) | 25 (23) | 50      | 14          | 1.17 (1.14)                                                                       | SB1230 | 1    |
|                   | 4100HR   | 5                                                                                 | 100 | 67        | 31.75 (32) | 18  | 26        | 12.7 (14.4) | 8.0 (8.0) | 33 (25) | 63 (50) | 14          | 2.35 (1.84)                                                                       | SB1630 | 1    |
|                   | 4100HR-M | 8                                                                                 | 100 | 67        | 31.75 (32) | 18  | 26        | 12.7 (14.4) | 8.0 (8.0) | 33 (25) | 63 (50) | 14          | 2.31 (1.82)                                                                       | SB1630 | 1    |
|                   | 4100HR-H | 9                                                                                 | 100 | 67        | 31.75 (32) | 18  | 26        | 12.7 (14.4) | 8.0 (8.0) | 33 (25) | 63 (50) | 14          | 2.31 (1.82)                                                                       | SB1630 | 1    |
|                   | 4125HR   | 7                                                                                 | 125 | 87        | 38.1 (40)  | 22  | 32        | 15.9 (16.4) | 10 (9.0)  | 35 (30) | 63      | 14          | 3.87 (3.79)                                                                       | SB2040 | 1    |
|                   | 4125HR-M | 10                                                                                | 125 | 87        | 38.1 (40)  | 22  | 32        | 15.9 (16.4) | 10 (9.0)  | 35 (30) | 63      | 14          | 3.82 (3.70)                                                                       | SB2040 | 1    |
|                   | 4160R    | 8                                                                                 | 160 | 107       | 50.8 (40)  | -   | 100       | 19 (16.4)   | 11 (9.0)  | 38 (32) | 63      | 14          | 5.0 (4.75)                                                                        | MBA    | 2    |
| 4160R-M           | 12       | 160                                                                               | 107 | 50.8 (40) | -          | 100 | 19 (16.4) | 11 (9.0)    | 38 (32)   | 63      | 14      | 4.97 (4.71) | MBA                                                                               | 2      |      |

( ) Metric size

### Available inserts

LNEX-MA LNM(E)X-MF LNM(E)X-MM



| Designation       | Cement |      |        |        |        |        |        |        |        |        | page |
|-------------------|--------|------|--------|--------|--------|--------|--------|--------|--------|--------|------|
|                   | CN2000 | CN30 | NCM325 | NCM330 | NCM535 | NCM545 | PC2505 | PC2010 | PC3600 | PC3700 |      |
| LNEX 151004PNR-MF |        |      |        |        |        |        |        |        |        |        | E11  |
| 151004PNR-MM      |        |      |        |        |        |        |        |        |        |        |      |
| 151004PNR-MA      |        |      |        |        |        |        |        |        |        |        |      |
| 151008PNR-MF      |        |      |        |        |        |        |        |        |        |        |      |
| 151008PNR-MM      |        |      |        |        |        |        |        |        |        |        |      |
| 151008PNR-MA      |        |      |        |        |        |        |        |        |        |        |      |
| 151016PNR-MF      |        |      |        |        |        |        |        |        |        |        |      |
| 151016PNR-MM      |        |      |        |        |        |        |        |        |        |        |      |
| Designation       | Cement |      |        |        |        |        |        |        |        |        | page |
|                   | CN2000 | CN30 | NCM325 | NCM330 | NCM535 | NCM545 | PC2505 | PC2010 | PC3600 | PC3700 |      |
| LNMX 151004PNR-MF |        |      |        |        |        |        |        |        |        |        | E11  |
| 151004PNR-MM      |        |      |        |        |        |        |        |        |        |        |      |
| 151008PNR-MF      |        |      |        |        |        |        |        |        |        |        |      |
| 151008PNR-MM      |        |      |        |        |        |        |        |        |        |        |      |
| 151016PNR-MF      |        |      |        |        |        |        |        |        |        |        |      |
| 151016PNR-MM      |        |      |        |        |        |        |        |        |        |        |      |
|                   |        |      |        |        |        |        |        |        |        |        |      |
|                   |        |      |        |        |        |        |        |        |        |        |      |

### Available arbors

| Designation |          | Available arbors |               |
|-------------|----------|------------------|---------------|
|             |          | RM4PC            | RM4PCM        |
| RM4PC(M)    | 4050HR   | -                | BT□□-FMC22-□□ |
|             | 4050HR-M |                  |               |
|             | 4063HR   |                  |               |
|             | 4063HR-M |                  |               |
|             | 4080HR   | BT□□-FMA25.4-□□  | BT□□-FMC27-□□ |
|             | 4080HR-M |                  |               |

| Designation |          | Available arbors |               |
|-------------|----------|------------------|---------------|
|             |          | RM4PC            | RM4PCM        |
| RM4PC(M)    | 4100HR   | BT□□-FMA31.75-□□ | BT□□-FMC32-□□ |
|             | 4100HR-M |                  |               |
|             | 4125HR   | BT□□-FMA38.1-□□  | BT□□-FMB40-□□ |
|             | 4125HR-M |                  |               |
|             | 4160R    | BT□□-FMA50.8-□□  | BT□□-FMC40-□□ |
|             | 4160R-M  |                  |               |

### Parts

| Specification |           |       |
|---------------|-----------|-------|
| Ø50~Ø160      | FTKA0412B | TW15S |

Available inserts E11 Available arbors and bolt E400~E402

