





STWPR/L

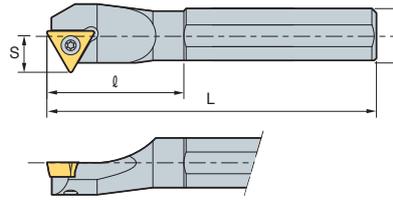

TP□□



60°

• R type insert (mm)





Designation	ØD	Ød	H	L	S	ℓ	Insert	Screw	Wrench	Fig.
S10M-STWPR/L-11	13	10	7	150	7	16	TPGH1102□□	FTNA0305	TW09P	2
S12M-STWPR/L-11	16	12	9	150	9	20	TPGH1103□□	FTNA0306	TW09P	
S16Q-STWPR/L-11	20	16	14	180	11	25	TPMT1103□□			
S20R-STWPR/L-11	25	20	18	200	13	32				

➔ Applicable inserts B81~B83

SVJCR/L



VC□□

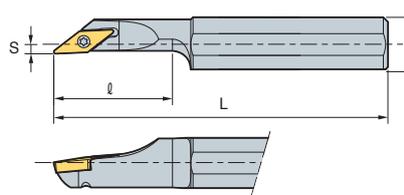

142°

• R type insert (mm)





Designation	ØD	Ød	H	L	S	ℓ	Insert	Screw	Wrench	Fig.
S12M-SVJCR/L-08	16	12	11	150	9	20	VCMT0802□□	FTNA0204	TW06P	2
S16Q-SVJCR/L-08	20	16	14	180	11	25				

➔ Applicable inserts B86~B87, B97

SVQBR/L



VB□□

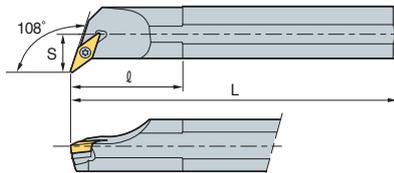

108°

• R type insert (mm)

Designation	ØD	Ød	H	L	S	ℓ	Insert	Screw	Shim	Shim Screw	Wrench	Fig.
S32S-SVQBR/L-16	40	32	30	250	22	50	VB□□1604□□	FTGA03512	SV32S	SHXN0509F	TW15P HW35L	3
S40T-SVQBR/L-16	50	40	38	300	27	60						
A32S-SVQBR/L-16	40	32	30	250	22	50						

➔ Applicable inserts B84~B85, B96

