
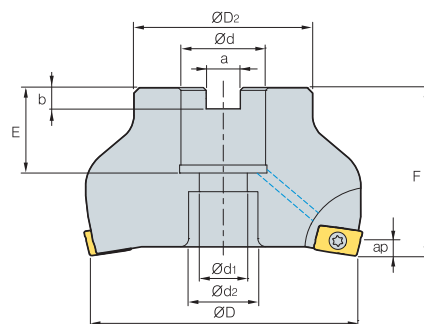


AMC(M)1000SE/2000SE



• AR: 45°
• RR: 0°

(mm)

Designation			ØD	ØD2	Ød	Ød1	Ød2	a	b	E	F	ap	
AMCM	1040HSE	4	40	34	16	9	14	8.4	5.6	19	40	2.5	0.26
	1050HSE	5	50	42	22	11	18	10.4	6.3	21	40	2.5	0.39
AMC (AMCM)	2080HSE	5	80	57	25.4 (27)	14	20	9.5 (12.4)	6.0 (7.0)	25 (22)	50	4	1.2
	2100HSE	6	100	67	31.75 (32)	18	26	12.7 (14.4)	8.0 (8.0)	32 (28)	63	4	2.33

()Metric size

Available inserts

APMT-MM

APMT-MF



Type	Designation		Cermet		Coated											Uncoated		page			
			CN2000	CN30	NCM325	NC5330	NCM535	NCM545	PC2505	PC2510	PC3600	PC3700	PC6510	PC9530	PC9540	PC5300	PC5400		G10	H01	
1000 type	APMT	060202PDSR-MM				●						●				●	●			E05	
		0602PDSR-MM				●			●	●	●	●	●			●	●				
		060208PDSR-MM				●					●	●					●	●			
		060212R-MM				●					●						●	●			
2000 type	APMT	11T3PDSR-MM			●	●	●		●	●	●	●	●			●	●				
		11T3PDSR-MF				●					●	●	●				●	●			
		11T308PDSR-MM				●					●	●		●	●		●	●			
		11T312PDSR-MM				●					●	●		●			●	●			
		11T316R-MM				●					●	●					●	●			
		11T318R-MM																			
		11T324R-MM				●					●	●				●	●				

E05

Available arbors

Type	Designation	Ød	NC arbors
1000 type	AMC (AMCM) 1040HSE	16	BT□□-FMC16-□□
	1050HSE	22	BT□□-FMC22-□□
2000 type	AMC (AMCM) 2080HSE	25.4	BT□□-FMA25.4-□□
		27	BT□□-FMC27-□□
	2100HSE	31.75	BT□□-FMA31.75-□□
		32	BT□□-FMC32-□□

Parts

Specification	Screw	Wrench	Wrench
Ø40~Ø50 (1000 type)	FTKA01842	-	TW06S-A
Ø80~Ø100 (2000 type)	FTKA02565S	TW08S	-

Available inserts E05 Available arbors and bolt E400~E402



Milling